






## TOOLS:


- [T4 Torx Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Phillips #00 Screwdriver](#) (1)
-

## Step 1 — Back Cover

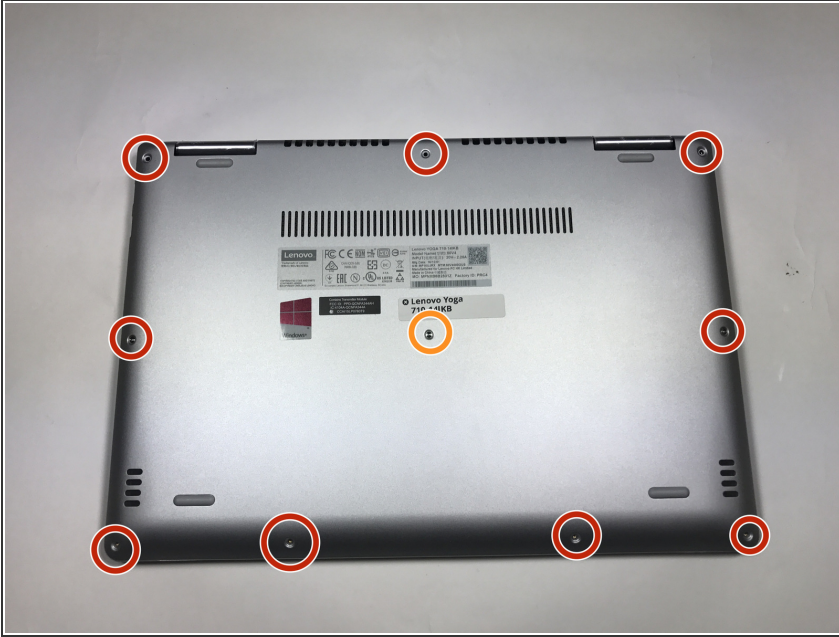

- Use a Torx T4 screwdriver to unscrew the 9 5mm screws holding the cover in place.
  - Use a Torx T4 screwdriver to unscrew the 8mm screw in the center.
- ✦ When, reassembling, make sure not to tighten the screws too much or you may risk cracking the plastic cover.

## Step 2

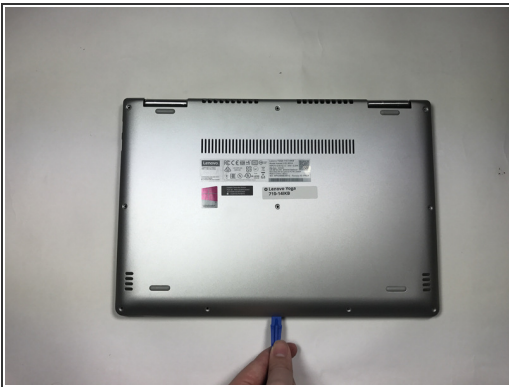

- Use the plastic opening tool to pry the cover up and away from the laptop, starting at one end and working your way around the cover.

⚠ The cover is large and flat and made of thin plastic. It cracks easily, so make sure not to pry too hard.



## Step 3 — SSD



- Use a Philips #00 screwdriver to remove the 3mm screw on the SSD.

## Step 4



- Use your fingers to lift up the SSD and pull away from the socket removing it from the laptop.

To reassemble your device, follow these instructions in reverse order.

